

TRILITE® AMP14L

Strong Base Anion Exchange Resin, Macroporous Type

Rev.2 April 2020

TRILITE® AMP14L is a strong base anion exchange resin (Macroporous type) manufactured by the advanced technologies. It has high whole bead count, good resistance to mechanical attrition, excellent chemical and physical stability and high capacity. All these traits will help you to get pure water with little trouble for quite a long time. TRILITE® AMP14L has proven to be highly efficient in decolorizing both cane and beet sugar solutions, as well as widely used in the decolorizing or deashing of aqueous solutions of other organic products, such as glycerine, sorbitol, etc.

Physical and Chemical Properties

Physical Form	Ivory opaque spherical beads	Matrix	Styrene-DVB, Macroporous
Functional Group	Quaternary amine	Ionic Form	Cl ⁻
Total Capacity(eq/ℓ)	1.00 ↑ (Cl ⁻)	Moisture Retention(%)	57~67
Shipping Density(g/ℓ)	670	Particle Density	1.10
Uniformity Coefficient	1.6 ↓	Particle Size(mm)	0.425~1.18
Whole Beads(%)	95 ↑	Swelling (Cl ⁻ →OH ⁻ , %)	23.5

Recommended Operating Conditions

Operating Temp(°C)	90(Cl ⁻), 70(OH ⁻)	pH Range	0~14
Bed Depth(mm)	750	Service Flow Rate(m/h)	5~50
Regeneration			
Regenerant	NaOH	Concentration(%)	4~6
Level(g/ℓ)	80~160	Flow Rate(BV/hr)	4~8
Rinse Requirement(BV)	5~10		

Applications

TRILITE® AMP14L used in decolorizing both cane and beet sugar solutions, as well as widely used in the decolorizing or deashing of aqueous solutions of other organic products, such as glycerine, sorbitol, etc.

Hydraulic Characteristics

Figure 1 shows the backwash expansion of TRILITE® AMP14 as a function of flow rate and temperature.

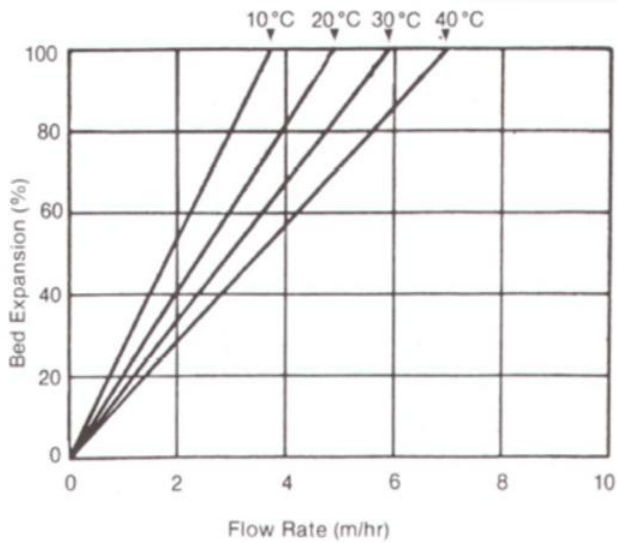


Figure 1. TRILITE® AMP14 Cl⁻ Type

Figure 2 shows the pressure drop of TRILITE® AMP14 as a function of flow rate and water temperature.

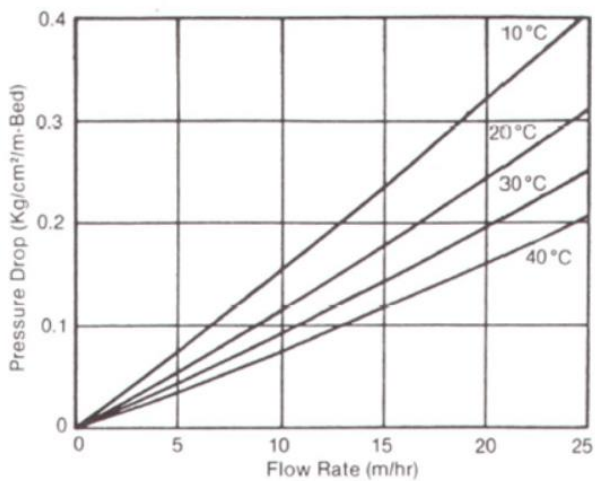


Figure 2. TRILITE® AMP14 Cl⁻ Type

All information contained in brochure is not absolute rather than relative one, created under the controlled environment by Samyang Corporation. Therefore, Samyang Corporation has no legal responsibility with respect to any and all information provided in brochure.

Samyang's TRILITE Ion exchange resins are produced based on the ISO 9001, ISO 14001 certification.

Samyang Corporation, 31 Jong-ro 33-gil, Jongno-gu, Seoul, Korea Tel: (02)740-7732~7, Fax: (02)740-7140

TRILITE
삼양 트리라이트
Ion Exchange Resin

<http://samyangtrilite.com>